


SCREW-MOUNT CABLE TIES

GS | SERIES



- UL Recognized
- Meets Military Specification
- Integrated screw hole head for mounting and securing
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Operating temperature range of -40°F (-4°C) to 185°F (85°C)
- Available in natural (code -9) or UV resistant black (code -0)

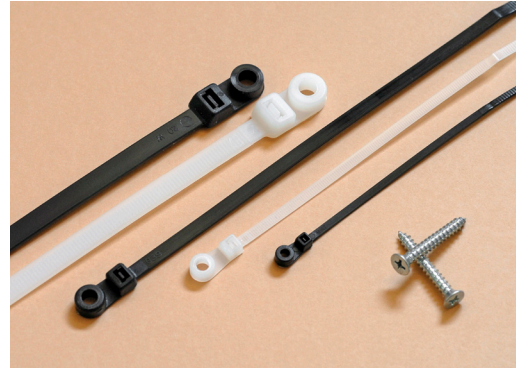

PART NUMBER	LENGTH <i>Inches (mm)</i>	WIDTH <i>Inches (mm)</i>	MAX BUNDLE DIAMETER <i>Inches (mm)</i>	MIN LOOP TENSILE STRENGTH	SCREW SIZE	PACKAGING	
						STD.	BULK
GS-18	4 3/8" (110)	0.10" (2.5)	3/4" (18)	18 lbs (8 kg)	#4	100	1000
GS-40	6" (156)	0.14" (3.6)	1 3/8" (35)	40 lbs (18 kg)	#8	100	1000
GS-50S	8" (205)	0.19" (4.8)	2" (54)	50 lbs (23 kg)	#10	100	1000
GS-50M	12 1/2" (300)	0.19" (4.8)	3" (79)		#10	100	1000
GS-50L	14 1/2" (370)	0.19" (4.8)	4" (102)		#10	100	100
GS-120	15" (380)	0.30" (7.6)	4 1/8" (104)	120 lbs (54 kg)	#10	100	100

RELEASABLE CABLE TIES

GR | SERIES



- UL Recognized
- Reusable design
- Simply press the tab at the head to release the lock
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Operating temperature range of -40°F (-4°C) to 185°F (85°C)
- Available in natural (code -9) or UV resistant black (code -0)



PART NUMBER	LENGTH <i>Inches (mm)</i>	WIDTH <i>Inches (mm)</i>	MAX BUNDLE DIAMETER <i>Inches (mm)</i>	MIN LOOP TENSILE STRENGTH	PACKAGING	
					STD.	BULK
GR-75S	7 7/8" (200)	0.30" (7.6)	2" (50)	50 lbs (23 kg)	100	100
GR-75M	11 3/4" (300)	0.30" (7.6)	3" (80)		100	100