


## MARKER (IDENTIFICATION) CABLE TIES

GM | SERIES


- UL Recognized
- Integrated marking pads
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Operating temperature range of -40°F (-4°C) to 185°F (85°C)

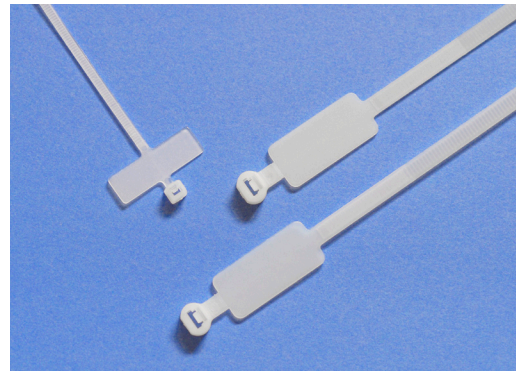

PART NUMBER	LENGTH <i>Inches (mm)</i>	WIDTH <i>Inches (mm)</i>	MAX BUNDLE DIAMETER <i>Inches (mm)</i>	MIN LOOP TENSILE STRENGTH	MARKING PAD SIZE <i>L X W (inches)</i>	PACKAGING	
						STD.	BULK
GM-18	3 7/8" (205)	0.10" (2.5)	3/4" (20)	18 lbs (8 kg)	0.3" x 1"	100	1000
GM-50S	8 5/8" (220)	0.19" (4.8)	1 5/8" (43)	50 lbs (23 kg)	1.1" x 0.5"	100	1000
GM-50M	11 3/4" (300)	0.19" (4.8)	2 3/4" (70)		1.1" x 0.5"	100	100
GM-50L	14 1/2" (370)	0.19" (4.8)	3 1/2" (88)		1.1" x 0.5"	100	100

## PUSH-MOUNT CABLE TIES

GP | SERIES

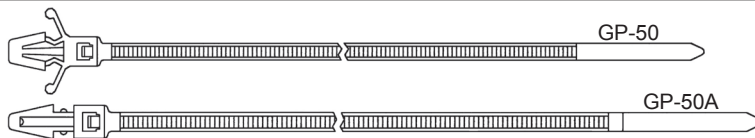

- UL Recognized
- Designed to mount in panel holes
- Two mount head designs available
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Operating temperature range of -40°F (-4°C) to 185°F (85°C)



PART NUMBER	LENGTH <i>Inches (mm)</i>	WIDTH <i>Inches (mm)</i>	MAX BUNDLE DIAMETER <i>Inches (mm)</i>	HOLE DIAMETER <i>Inches (mm)</i>	PANEL THICKNESS <i>Inches (mm)</i>	MIN LOOP TENSILE STRENGTH	PACKAGING	
							STD.	BULK
GP-50	7 5/8 (195)	0.19" (4.8)	1.77" (45)	0.252 (6.4)	0.126" (3.2)	50 lbs (23 kg)	100	100
GP-50A	7 7/8 (200)	0.19" (4.8)	1.81" (46)	0.248 (6.3)	0.141" (3.6)		100	100