




DOUBLE LOOP CABLE TIES

GDL | SERIES

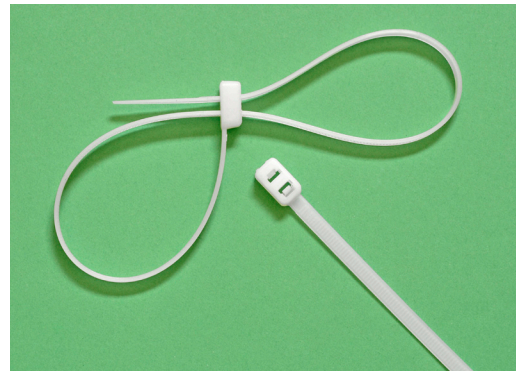


- UL Recognized
- Designed to tie two cable bundles together
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Natural operating temperature range of -40°F (-4°C) to 185°F (85°C)




PART NUMBER	LENGTH <i>Inches (mm)</i>	WIDTH <i>Inches (mm)</i>	MAX BUNDLE DIAMETERS <i>Inches (mm)</i>	MIN LOOP TENSILE STRENGTH	PACKAGING	
					STD.	BULK
GDL-50S	7 7/8" (200)	0.19" (4.8)	1.85" (47) + 1.77" (45)	50 lbs (23 kg)	100	100
GDL-50M	11 4/5" (300)	0.19" (4.8)	2.83" (72) + 2.76" (70)		100	100
GDL-50L	14 1/2" (370)	0.19" (4.8)	3.94" (100) + 3.82" (97)		100	100

BEADED TIES

GBT | SERIES



- UL Recognized
- Quickly secure and release bundles
- Manufactured from 100% virgin-grade Nylon 6/6
- Self-extinguishing 94V-2
- Operating temperature range of -40°F (-4°C) to 185°F (85°C)

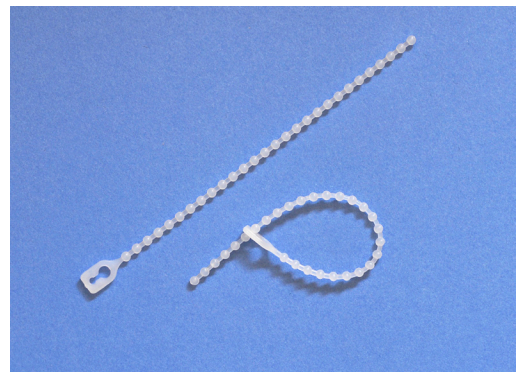

PART NUMBER	LENGTH <i>Inches (mm)</i>	MAX BUNDLE DIAMETER <i>Inches (mm)</i>	MIN LOOP TENSILE STRENGTH	PACKAGING	
				STD.	BULK
GBT-100	4 1/5" (105)	1 1/8" (29)	8.8 lbs (4 kg)	100	1000