
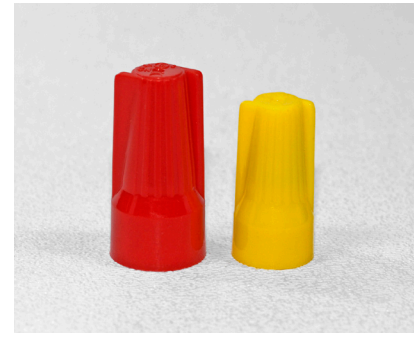


## TWIST-ON WIRE CONNECTORS

**GEC** | EASY-CAP SERIES

### GEC Easy-Cap Twist-On Wire Connectors features:

- UL Listed, CSA Approved components
- Fixed internal wire spring secures connection with optimum conductivity
- UL 94-V2 Flame retardant thermoplastic insulation shell
- Full length "easy" winged design provides firm and comfortable twisting
- Deep skirt for superior protection against shorts and flashovers




PART NUMBER	COLOR	A (in/mm)	B (in/mm)	C (in/mm)	A.W.G.	VOLTAGE	TEMP (°C / °F)	PACKAGING	
								STD.	BULK
GEC-N1	Yellow	0.992 25.2	0.492 12.5	0.429 10.9	22-10	600V*	105 / 221	100	500
GEC-N2	Red	1.161 29.5	0.583 14.8	0.520 13.2	22-6	600V*	105 / 221	100	500

\* Rated 1,000V maximum in lighting fixtures and signs

## TWIST-ON WIRE CONNECTORS

**GAP** | ALL PLASTIC SERIES

PART NUMBER	COLOR	A (in/mm)	B (in/mm)	C (in/mm)	A.W.G.	VOLTAGE	TEMP (°C / °F)	PACKAGING	
								STD.	BULK
GAP-1	Yellow	0.563 14.3	0.339 8.6	0.256 6.5	22-16	300V	105 / 221	100	1000
GAP-2	Ivory	0.677 17.2	0.394 10.00	0.311 7.9	22-16	300V	105 / 221	100	1000
GAP-3	Ivory	0.874 22.2	0.437 11.1	0.358 9.1	22-14	600V	105 / 221	100	1000

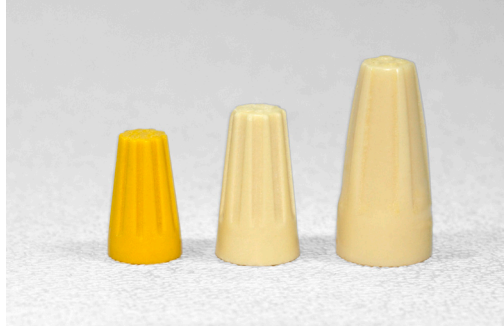

## CLOSE-END CRIMP CONNECTORS

**GCE** | SERIES

PART NUMBER	A.W.G.	VOLTAGE	TEMP (°C / °F)	LENGTH (A) (in/mm)	BOTTOM (B) DIAMETER (in/mm)	BARREL (C) DIAMETER (in/mm)	PACKAGING	
							STD.	BULK
GCE-1	22-18	300V	105 (221)	0.709 18.0	0.307 7.8	0.102 2.6	100	1000
GCE-2	22-14	300V		0.776 19.7	0.374 9.5	0.118 3.0	100	1000
GCE-5	22-10	300V		1.004 25.5	0.492 12.5	0.157 4.0	100	1000
GCE-8	16-10	300V 600V CSA		1.091 27.7	0.575 14.6	0.209 5.3	100	500

**GREENLITE**