


# BLOCK SPADES (NON-FLANGED)

GS | NYLON SERIES

**Maximum Electrical Current:**

22-16 A.W.G.: 19 amperes  
 16-14 A.W.G.: 27 amperes  
 12-10 A.W.G.: 48 amperes



**Maximum Electrical Rating:**


105 °C (221 °F)  
 600 volts

**Insulation Material:** Nylon

**Terminal Material:** Copper (tin-plated)

WIRE RANGE A.W.G.	PART NUMBER	STUD SIZE	DIMENSIONS (inches/mm)								BULK QTY
			d2	W	F	L	E	D	d1	T	
22-16	GS-R6N	#6	0.146 3.7	0.252 6.4	0.256 6.5	0.866 22.0	0.433 11.0	0.157 4.0	0.067 1.7	0.030 0.75	1000
	GS-R8N	#8	0.169 4.3	0.283 7.2	0.256 6.5	0.866 22.0					1000
	GS-R10N	#10	0.209 5.3	0.374 9.5	0.256 6.5	0.866 22.0					1000
16-14	GS-B6N	#6	0.146 3.7	0.236 6.0	0.256 6.5	0.866 22.0	0.433 11.0	0.177 4.5	0.091 2.3	0.031 0.8	1000
	GS-B8N	#8	0.169 4.3	0.283 7.2	0.256 6.5	0.866 22.0					1000
	GS-B10N	#10	0.209 5.3	0.366 9.3	0.256 6.5	0.866 22.0					1000
12-10	GS-Y8N	#8	0.169 4.3	0.354 9.0	0.276 7.0	1.004 25.5	0.512 13.0	0.248 6.3	0.134 3.4	0.039 1.0	1000
	GS-Y10N	#10	0.209 5.3	0.354 9.0	0.276 7.0	1.004 25.5					1000

## CRIMPING TOOLS

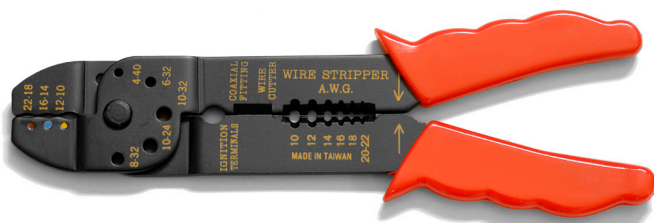

**GCT-2001 CRIMPING TOOL**

An affordable 4-way crimping and stripping tool designed for use with 22-10 AWG crimp terminals and connectors. The GCT-2001 features color coded crimping pliers, AWG-numbered wire insulation strippers, and integrated wire cutter. This tool can be used with all Greenlite crimp products. Total length: 8".

**GMST-07 PLIER**

A high quality crimping plier designed specifically for use with UR, UY, and UB telecom connectors (see page 27). The GMST-07 features parallel crimping action at point of contact for the most secure crimp for telecom connectors. May also be used for crimping our entire line of crimp terminals and connectors. Total length: 5 1/2"