

FULLY INSULATED QUICK-SLIDES

GFQF | FEMALE SERIES

Maximum Electrical Current:

22-16 A.W.G.: 10 amperes

16-14 A.W.G.: 15 amperes

12-10 A.W.G.: 24 amperes



Maximum Electrical Rating:

105 °C (221 °F)

300 volts

Insulation Material: Nylon

Terminal Material: Brass (tin-plated)

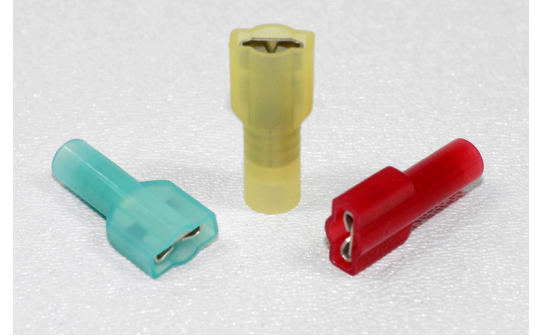

| WIRE RANGE A.W.G. | PART NUMBER | NEMA TAB SIZE | DIMENSIONS (inches/mm) | | | | | | BULK QTY |
|----------------------|----------------|-------------------------------|------------------------|--------------|---------------|---------------|--------------|--------------|-------------|
| | | | W | F | L | B | D | C | |
| 22-16 | GFQF-R25N | 0.250 x 0.032 (6.35 x 0.8) | 0.260 6.6 | 0.287 7.3 | 0.866 22.0 | 0.433 11.0 | 0.157 4.0 | 0.067 1.7 | 1000 |
| 16-14 | GFQF-B25N | 0.250 x 0.032 (6.35 x 0.8) | 0.260 6.6 | 0.287 7.3 | 0.866 22.0 | 0.433 11.0 | 0.177 4.5 | 0.091 2.3 | 1000 |
| 12-10 | GFQF-Y25N | 0.250 x 0.032 (6.35 x 0.8) | 0.260 6.6 | 0.287 7.3 | 0.945 24.0 | 0.512 13.0 | 0.248 6.3 | 0.134 3.4 | 1000 |

FULLY INSULATED QUICK-SLIDES

GFQM | MALE SERIES

Maximum Electrical Current:

22-16 A.W.G.: 10 amperes

16-14 A.W.G.: 15 amperes

12-10 A.W.G.: 24 amperes



Maximum Electrical Rating:

105 °C (221 °F)

300 volts

Insulation Material: Nylon

Terminal Material: Brass (tin-plated)

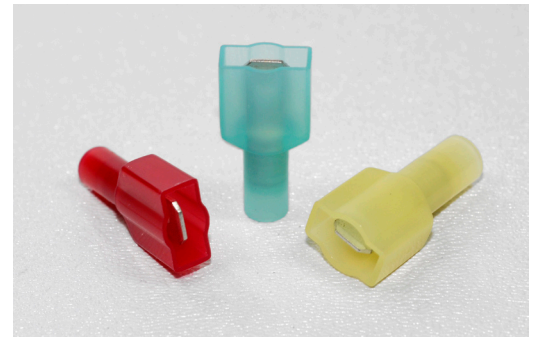

| WIRE RANGE A.W.G. | PART NUMBER | NEMA TAB SIZE | DIMENSIONS (inches/mm) | | | | | | BULK QTY |
|----------------------|----------------|-------------------------------|------------------------|--------------|---------------|---------------|--------------|--------------|-------------|
| | | | W | F | L | B | D | C | |
| 22-16 | GFQM-R25N | 0.250 x 0.032 (6.35 x 0.8) | 0.250 6.35 | 0.303 7.7 | 0.906 23.0 | 0.433 11.0 | 0.157 4.0 | 0.067 1.7 | 1000 |
| 16-14 | GFQM-B25N | 0.250 x 0.032 (6.35 x 0.8) | 0.250 6.35 | 0.303 7.7 | 0.945 24.0 | 0.433 11.0 | 0.177 4.5 | 0.091 2.3 | 1000 |
| 12-10 | GFQM-Y25N | 0.250 x 0.032 (6.35 x 0.8) | 0.250 6.35 | 0.303 7.7 | 0.984 25.0 | 0.512 13.0 | 0.248 6.3 | 0.134 3.4 | 1000 |