


TELECOM CONNECTORS

U SERIES

U Series Telecom Splicing Connectors feature:

- Silicone gel fill for improved conductance and insulation
- Easy one step crimping (via our GMST-07 crimping tool)
- Transparent housing for visual inspection of connections

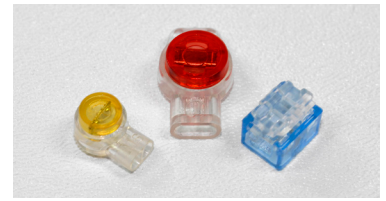

PART NUMBER	DIMENSIONS	Maximum Insulation O.D.	CABLE TYPES ACCEPTED			QTY
			PIC unfilled	PIC filled	Pulp or Paper	
UY		1.52mm 0.060"	.7 - .4mm .028\"-.016"	.7 - .4mm .028\"-.016"	.7 - .4mm .028\"-.016"	100 pcs. per box
			22-26 A.W.G.	22-26 A.W.G.	22-26 A.W.G.	1000 pcs. per sleeve
UB		1.27mm 0.050"	.7 - .4mm .028\"-.016"	.5 - .4mm .020\"-.016"	.7 - .4mm .028\"-.016"	100 pcs. per box
			22-26 A.W.G.	24-26 A.W.G.*	22-26 A.W.G.	1000 pcs. per sleeve
UR		1.67mm 0.066"	.9 - .4mm .035\"-.016"	.9 - .4mm .035\"-.016"	.9 - .4mm .035\"-.016"	100 pcs. per box
			19-26 A.W.G.	19-26 A.W.G.**	19-26 A.W.G.	1000 pcs. per sleeve

* NOTE: Can also be used on 22 A.W.G. Foam Insulated Cable.


** NOTE: Can also be used on 19 A.W.G. Foam Insulated Cable.

TELECOM CONNECTORS

B SERIES

B Series Telecom Splicing Connectors feature:

- Insulation-piercing internal teeth
- Soft brass crimp and connector
- Durable protective outer shell



PART NUMBER	DIMENSIONS (inches/mm)		SILICONE FILL	CONNECTOR MATERIAL	PACKAGING	
	W	L			STD.	BULK
BW2	0.157 4.0	0.984 25.0	NO	BRASS	100	1000
BB2	0.157 4.0	1.024 26.0	YES	BRASS	100	1000

THREAD SEAL TAPE

PTFE SERIES



PART NUMBER	LENGTH Inches	WIDTH Inches	THICKNESS Inches	MIL-SPEC	PACKAGING	
					STD.	BULK
PTFE-260	260"	1/2"	0.0035"	MIL-T-27730A	200	1200
PTFE-520	520"	1/2"	0.0035"	MIL-T-27730A	200	1200